


NORDWOOD

Sistema parete a vetro singolo o a vetro doppio
a superficie continua con profili in legno
*Single or double glazed wall system
with continuous surface and wooden profiles*

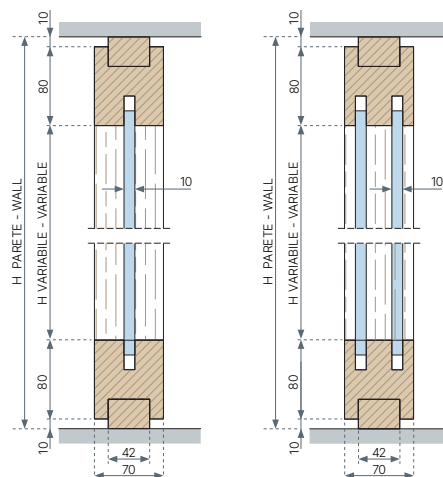

Spessore parete <i>Wall thickness</i>	70 mm
Altezza massima <i>Maximum height</i>	3000 mm con vetro unico a tutta altezza <i>for full height glass panel</i>
Larghezza Moduli <i>Width of modules</i>	da-from 300 mm a-to 1500 mm
Peso unitario medio <i>Average weight</i>	34 kg/mq - kg per sq. meter
Fuga Canale superiore <i>Ceiling shadow line</i>	10 mm
Fuga Canale inferiore <i>Floor shadow line</i>	10 mm
Giunti policarbonato <i>Polycarbonate joiners</i>	4 mm
Vetro temperato modulo <i>Glass thickness (toughened)</i>	10 mm • 12 mm
Vetro stratificato modulo <i>Laminated glass thickness</i>	5+5 mm con-with PVB 0,38 mm 6+5 mm con-with PVB 0,38 mm
Vetro stratificato acustico <i>Acoustic laminated glass thickness</i>	6+6 mm con-with PVB 0,76 mm
Vetro temperato porta <i>Toughened glass for door</i>	10 mm • 12 mm
Battente cieco <i>Solid door leaf</i>	50 mm
Tolleranza a soffitto <i>Ceiling adjustment</i>	+/- 10 mm
Tolleranza laterale <i>Side/wall adjustment</i>	+/- 10 mm